


Assembling and Installing your SmartCat Sky Climber

Step 1. Familiarize yourself with the components included with the Sky Climber

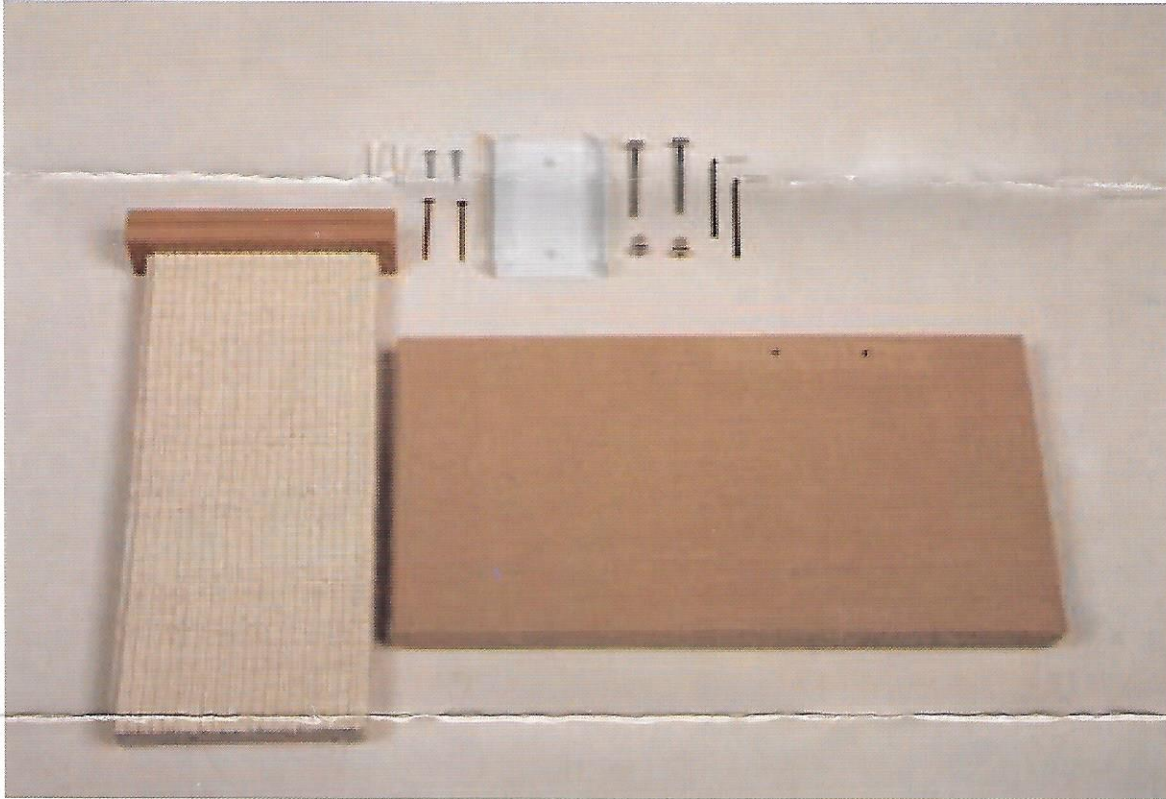

Perch- the horizontal platform for your cat to rest on

Sisal covered vertical panel- this is the part that is secured to your wall.

Metal wall mounting bracket- (look on the back of the sisal covered vertical panel and remove the white bracket from the sisal panel by sliding /lightly tapping it down a $\frac{3}{4}$ " of an inch.)

Two Connecting bolts and nuts- these will be used to connect the sisal wall panel to the perch

Two Hex (Allen) wrenches-Use these to tighten the connecting bolts & nuts.

Two Wood Screws 1-1/2 inch long. Use these screws to secure the white mounting bracket to wood studs behind the wallboard on your wall. Note: this is the recommended method of mounting your Sky Climber as it provides the most secure method of mounting


Two Hollow wall fasteners and screws-If you are unable to secure your climber to the wood studs in you wall these can be used. (When properly installed they should support a minimum of 30 pounds)

Step 2 Recommended method. With a stud finder or similar tool locate a vertical wood stud on the wall on which you plan to mount the Sky Climber. (Most walls are constructed with a wood stud spaced every 16")

If you are planning on multiple climbers for enhanced enjoyment for your cat this is the recommend spacing for them. The height measurement between multiple climbers will depend on the age and/or agility of your cat(s).

Once you have located a wood stud in your wall decide the height that you want to mount your climber. Again, you will need to take into account the general health and strength of your cat. (Most cats in good health and physical fitness should have not trouble reaching 30" or more.)

Using a level or by eye make sure the mounting bracket is being held level –mark the position of the two holes on the wall (keep in mind that the height of the perch will be about 12" down from the top of the metal bracket.) Pre-drill two holes through the drywall and wood stud. Using the two longer screws furnished secure the metal bracket to the wall. Make sure the vertical leg of the “L” shaped slots are facing down.

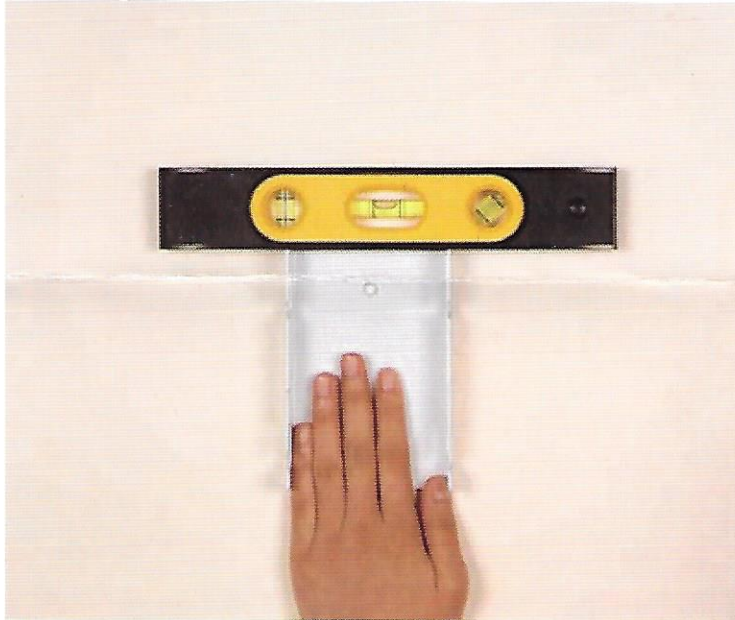

Optional Method (Using the hollow wall fasteners) Locate the position of the bracket as described above and mark and drill a small pilot hole. Insert the plastic hollow-wall into the pilot hole and “screw” into the drywall with a Phillips style screw drive until it is flush with the wall. Using the two shorter screws included fasten the metal bracket to the wall as describe above.

Step 3. Hold up the sky climber and position the four screws (on back side of the climber) to align with the horizontal slots in the bracket and push the climber against the wall to engage the screws into the slots. Tap down on the top of the climber to secure it onto the bracket.

If there are any problems with assembly please email us at info@esmartcat.com or call us at 866-3176278